


Medium Filter

# Medium Synthetic Panel Filter

(Pleated Synthetic Fiber)

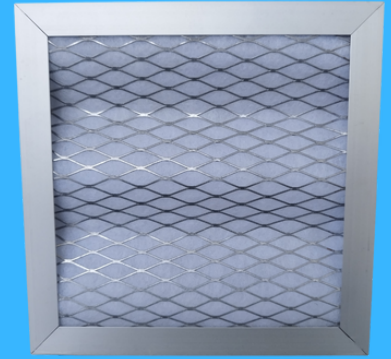

## Product Features

- Frame : Alumunium with Liner Support
- Media : Pleated Synthetic Fiber
- IPD Specification : 15 Pa
- FPD Specification : 150 Pa
- Liner Media : 2
- Color Media : White

Type	Frame							Specification			Media
	Nominal (in.)			Actual (mm)			Wt.	Air Flow	Class	Efficiency	Type
	W	H	D	W	H	D	kG	(CMH)			
MSP 289W-594H-46T-F5L2V12	12	24	2	289	594	46	0.73	1600	F5	40% ≤ Em < 60%	V12
MSP 492W-594H-46T-F5L2V12	20	24	2	492	594	46	1.33	2700	F5	40% ≤ Em < 60%	V12
MSP 594W-594H-46T-F5L2V12	24	24	2	594	594	46	1.72	3200	F5	40% ≤ Em < 60%	V12
MSP 289W-594H-46T-F6L2V13	12	24	2	289	594	46	0.74	1600	F6	60% ≤ Em < 80%	V13
MSP 492W-594H-46T-F6L2V13	20	24	2	492	594	46	1.34	2700	F6	60% ≤ Em < 80%	V13
MSP 594W-594H-46T-F6L2V13	24	24	2	594	594	46	1.75	3200	F6	60% ≤ Em < 80%	V13
MSP 289W-594H-46T-F7L2V15	12	24	2	289	594	46	0.75	1600	F7	80% ≤ Em < 90%	V15
MSP 492W-594H-46T-F7L2V15	20	24	2	492	594	46	1.38	2700	F7	80% ≤ Em < 90%	V15
MSP 594W-594H-46T-F7L2V15	24	24	2	594	594	46	1.79	3200	F7	80% ≤ Em < 90%	V15
MSP xxxW-yyyH-zzT-F--L2V--	Custom			xxx	yyy	zz	-	-	F--	-	V--

